

JET BOAT COVER WITH ANTI-POOLING SYSTEM

Dear consumer,

Your new **YAMAHA** Jet Boat cover is quite unique. It was carefully designed by Commercial Sewing, Inc. and Yamaha to accommodate both mooring and trailering, with tower or bimini option and without.

▲ WARNING: To prevent damage to your boat and/or cover please read and understand instructions before attempting to use cover.

It features:

1. A special anti-pooling system is included to prevent large puddles from ruining your cover.
2. The SurLast® all-weather fabric was chosen to allow stability, water repellency and breathe-ability.
3. The Vacu-Hold™ system allows trailering at highway speeds (65 mph) without billowing or buffeting.
4. The new ratchet and drawstrap type attachment will allow easy, tight and secure installation.

CARE, WARRANTY AND INSTALLATION INSTRUCTIONS

Hint-To properly install ratchet strap system.

1. Pull the webbing through the channeled ratchet cylinder and tension while ratcheting to "start" the webbing.
2. Tension the ratchet with about 5 lbs. of pressure (pinky finger). Pull the sides of the cover to even the webbing throughout. Re-tension about 5 lbs. (the ratchet should be tight on the side of the boat lever, perpendicular to the hull).
3. Crank the ratchet approximately 5 full additional times to add tension (based on an 18' boat).
4. Check boat webbing for tension during stops while trailering. (webbing may stretch during first installation and use CHECK OFTEN).

▲ WARNING: Readjust and retighten the cover after trailering and before storage. To prevent pooling do not allow snow and ice to accumulate on the cover. Never trailer at speeds above the speed limit.

CARE INSTRUCTIONS- Wash with warm soapy water (while installed if possible) and allow to air dry. For stubborn stains, mild detergent is recommended.

Storing the boat in constant direct sunlight will shorten the life of the cover and the components used to construct it. We recommend storing the boat in a location that exposes it to some sun and also shades it throughout the day. Preferably morning sun and afternoon shade.

WARRANTY- This cover includes a 90 day warranty from date of purchase against any defects in material or workmanship. If you incur any problems or have any comments please contact your Yamaha dealer or call Commercial Sewing Customer Service directly at (860) 482-5509.


PROPER INSTALLATION-

A1. Anti-Pooling System Installation:


Install anti-pooling system as per illustration putting the white webbing to the two front cleats, standing front pole upright. Pull center strap toward back of boat. Pull the other two webbing straps to the two rear cleats. Tighten adjustable buckle in the

A2. Anti-Pooling System Installation:

Install anti-pooling system as per illustration putting the colored webbing to the two front handles connecting buckles, standing front pole upright. Pull center strap toward back of boat. Lift rear center seat, standing rear pole within frame of seat. Pull the other two webbing straps to the two rear cleats and tighten adjustable buckles. For boats with bimini top feed webbing over the bimini top prior to connecting around cleats.

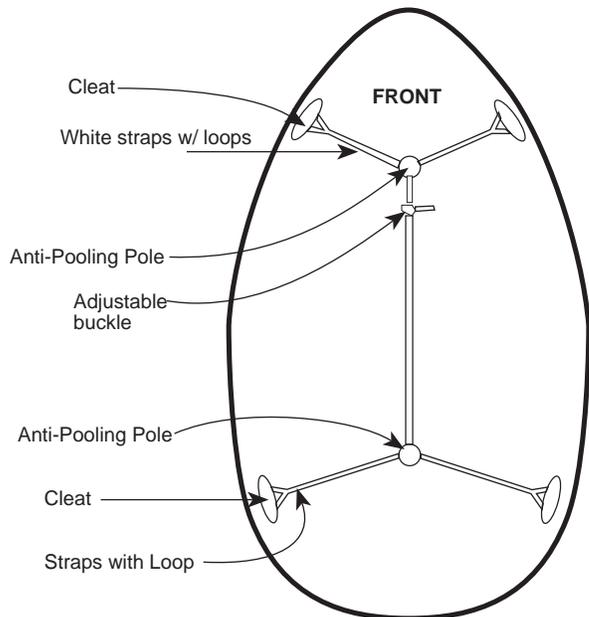

A1.

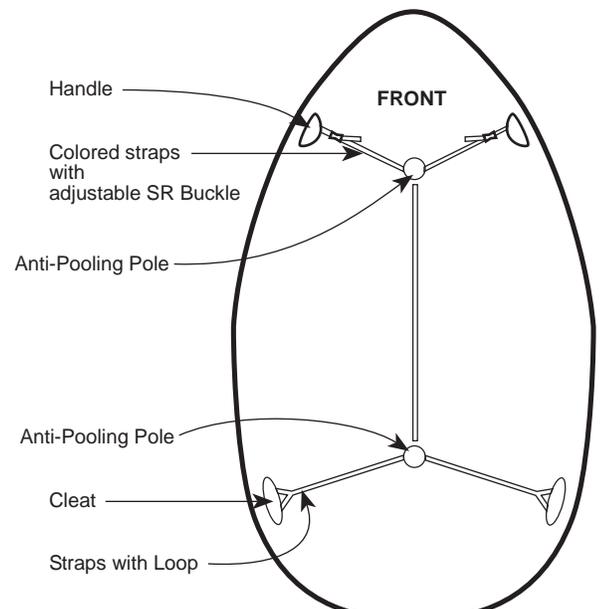

A2.



JET BOAT COVER WITH ANTI-POOLING SYSTEM

B. Proper Cover Installation:

- Place cover on boat starting at front, use cleats as buttons to keep cover in place, work toward back over pooling system until back cleats are "buttoned" in place.
- Maneuver in place until cover fits over gunwale. (For boats with tower disconnect buckles and velcro and reconnect around the base of the tower.) Check the symmetry.
Begin ratcheting by disconnecting the velcro wrap, unzipping ratchet pocket and pulling ratchet handle in right-to-left motion until zippered ratchet pocket no longer sags but rests against the hull.
- Pull on webbing to even the tension around the cover and again tighten the ratchet until it does not sag but rests against the boat. Tighten ratchet four to five more times. The ratchet should be very hard to pull with your pinky finger. Zip pocket closed and connect velcro around the pocket.
Note where velcro attached to cover falls under gunwale. Clean area with isopropyl rubbing alcohol and allow to dry thoroughly. Peel backing of self-adhesive velcro, adhere to noted area, maximum velcro adhesion will occur in 24 hrs.

Note: Proper installation and operation of this cover requires that it be very tight at the gunwale. Retighten as necessary before, after and during stops while trailering. BE SURE cover is installed below gunwale before final ratchet adjustment. ZIP ratchet pocket closed for final installation.

Warning:

Zippered ratchet mechanism should be hand tightened only. Do not pry or attempt to operate ratchet mechanism with any type of tool.

REMOVAL-

- Disconnect velcro wrap & zip open ratchet pocket.
- Follow instructions on ratchet label to release pressure.
- Once pressure is released pull out webbing to allow simple future installation, then close handle and ZIP POCKET closed (this is important to prevent damage in future installation).
- Disconnect trailer straps. Remove and fold cover working from rear to front.

ANTI-POOLING POLE STORAGE-

- Disconnect anti-pooling poles from either the front (colored webbing) or back.
- After disconnecting collapse poles by pushing buttons and telescoping them down.
- Wrap webbing around poles and install in bag provided.

CARE INSTRUCTIONS- Wash with warm soapy water (while installed if possible) and allow to air dry. For stubborn stains, mild detergent is recommended.

WARRANTY- This cover includes a 90 day warranty from date of purchase against any defects in material or workmanship. If you incur any problems or have any comments please contact your Yamaha dealer or call Commercial Sewing Customer Service directly at (860) 482-5509.